

MF48




MF48

DATI	DATA	ANGABE	DATOS	DONNÉES	
Carico statico max	Max. static load	Statische Höchstlast	Max carga estatica	Charge statique maxi	kg 3100
Rapporti	Ratios	Übersetzungen	Reducciones	Rapports	1/60 1/47 2/71 3/56
Gamma potenze a 4/16 poli	Powers range at 4/16 poles	Leistungsbereich für 4/16 Polen	Escala potencias con 4/16 polos	Gamme puissances 4/16 pôles	3.5 → 7.3 kW SYNC
Gamma potenze a 6/24 poli	Powers range at 6/24 poles	Leistungsbereich für 6/24 Polen	Escala potencias con 6/24 polos	Gamme puissances 6/24 pôles	2.9 → 4.4 kW SYNC
Gamma potenze VVVF a 4 poli	Powers range VVVF at 4 poles	Leistungsbereich VVVF für 4 Polen	Escala potencias VVVF con 4 polos	Gamme puissances VVVF 4 pôles	3.3 → 11.4 kW SYNC
Momento d'inerzia J	Moment of inertia J	Tragheitsmoment J	Momento de inercia J	Moment d'inertie J	Kgm ² 0.011
Capacità olio	Oil capacity	Ölmenge	Capacidad aceite	Capacité huile	3.8 l

	TABELLA DEI PESI Senza volante e puleggia	WEIGHT TABLE Without fly-wheel and sheave	GEWICHTSTABELLE Ohne Schwunzscheibe und Tr-Kranz	TABLA DE PESOS Sin volante y polea	TABELLE DES POIDS Sans volant et poulie
Potenza motore Motor power	4/16	kW 3.5 → 4.0 kg 245	kW 4.9 kg 250	kW 5.5 kg 256	kW 6.0 → 7.3 kg 268
Leistungsbereich Potencias motor	6/24	kW 2.9 → 3.3 kg 259	kW 3.7 → 4.0 kg 271	kW 4.4 kg 276	
Puissance moteur	VVVF	kW 3.3 → 5.9 kg 245	kW 6.6 → 7.3 kg 250	kW 7.7 → 11 kg 256	kW 11.4 kg 268

MF48

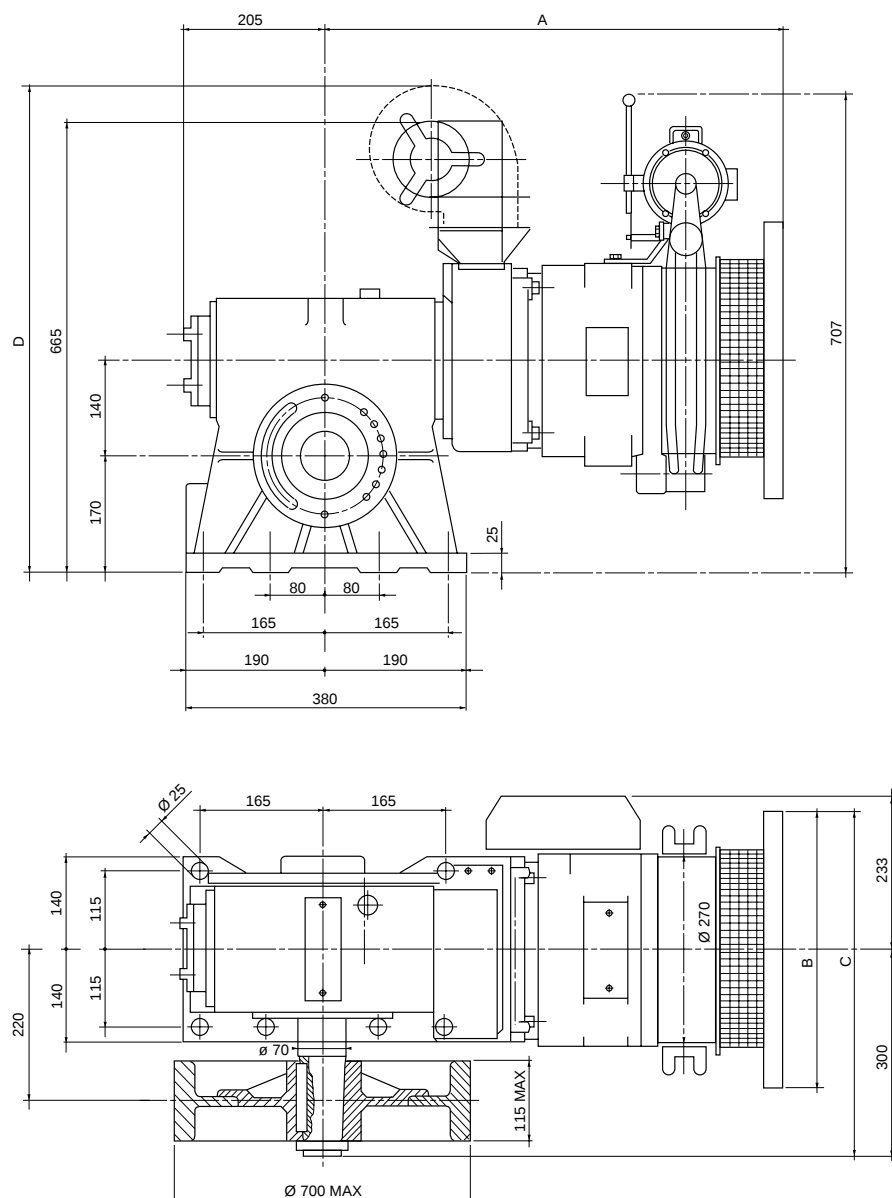

4/16 POLI	kW _{SYNC}	3.5/7.3
	A	675
	B	460
	C	530

6/24 POLI	kW _{SYNC}	2.9/4.4
	A	675
	B	460
	C	530

VVVF	kW _{SYNC}	3.3/11.4
	A	655
	B	350
	C	475

Attacco con encoder standard
 Coupling for standard encoder
 Anbau für standard Impulsgeber
 Embrague standard encoder
 Accouplement standard encoder

